


# Integrating Land Use and Socioeconomic Factors into Scenario-Based Travel Demand and Carbon Emission Impact Study

Heng Wei<sup>1,2,6</sup>  · Ting Zuo<sup>3</sup> · Hao Liu<sup>4</sup> · Y. Jeffrey Yang<sup>5</sup>

Received: 6 January 2017 / Revised: 11 March 2017 / Accepted: 27 March 2017 / Published online: 8 April 2017  
© The Author(s) 2017. This article is an open access publication

**Abstract** Integration of land use and transportation planning with current and future spatial distributions of population and employment is a challenge but critical to sustainable planning outcomes. The challenge is specific to how sustainability factors (e.g., carbon dioxide emission), and land use and socioeconomic changes are considered in a streamlined manner. To address the challenge, this paper presents an integrated modeling and computing framework for systemic analysis of regional- and project-level transportation environmental impacts for land use mix patterns and associated transportation activities. A synthetic computing platform has been developed to facilitate the scenario-based quantitative analysis of cause-and-effect mechanisms between land use changes and/or traffic management and control strategies, their impacts on traffic mobility and the environment. Within the integrated platform, multiple models for land use pattern, travel demand forecasting, traffic simulation, vehicle and carbon emission, and other

operation and sustainability measures are integrated using mathematical models in a Geographical Information System environment. Furthermore, a case study of the Greater Cincinnati area at regional level is performed to test the integrated functionality as a capable tool for urban planning, transportation and environmental analysis. The case study results indicate that such an integration investigation can help assess strategies in land use planning and transportation systems management for improved sustainability.

**Keywords** Integration · Land use · Socioeconomic factor · Travel demand · Transportation environmental sustainability · Carbon emission

## 1 Background and Research Motivation

Environmentally sustainable planning greatly relies on the support of synthetic analysis by using models that integrate land use and transportation planning, dwelling and

---

✉ Heng Wei  
heng.wei@uc.edu

Ting Zuo  
zuotg@mail.uc.edu

Hao Liu  
liuhao@berkeley.edu

Y. Jeffrey Yang  
Yang.Jeff@epa.gov

<sup>1</sup> Beijing University of Technology, Beijing, China

<sup>2</sup> Department of Civil & Architectural Engineering & Construction Management, The University of Cincinnati, 792 Rhodes Hall, Cincinnati, OH 45221-0071, USA

<sup>3</sup> Department of Civil & Architectural Engineering & Construction Management, The University of Cincinnati, 729 Engineering Research Center, Cincinnati, OH 45221-0071, USA

<sup>4</sup> PATH Program, The University of California at Berkeley, Richmond Field Station, Bldg. 452, 1357 South 46th Street, Richmond, CA 94804-4648, USA

<sup>5</sup> National Risk Management Research Laboratory, Water Supply and Water Resources Division, U.S. Environmental Protection Agency, 26 Martin Luther King Blvd., Cincinnati, OH 45268, USA

<sup>6</sup> Chang'an University, Xian, China

employment-related spatial distributions, as well as other related social economy factors. However, such an integration is scarce in practice [1–4]. The challenge appears specific to the need of integrating sustainability factors (e.g., transportation carbon emission), and land use and socioeconomic factors into the development process. [3–6]. Some previous studies revealed that core models to be incorporated in the integration include the land use model, travel demand forecasting model, vehicle emission, and microscopic traffic simulation model [3, 7, 8]. The best integration is to interconnect and imbed those models through data flows in a Geographical Information System (GIS) environment [3, 4, 9, 10].

Recent studies suggested that land use pattern and associated economic changes influence travel behavior and demand. Performance can be measured by vehicle miles travelled (VMT), vehicle hours travelled (VHT), and vehicle emissions over roadway networks. All these variables are impacted by travel patterns or travel behaviors which are closely linked with land use density, diversity, and accessibility [8, 11–15]. Land use density is measured by the population and employment in a given geographical unit (i.e., census tracts, traffic analysis zones, etc.). High densities are often associated with high accessibility to opportunity sites [16].

Strong mismatch between the locations of jobs and houses possibly results in much longer commuting distances. To reduce commuting cost (measured by combined travel distance and time), it is an ideal planning to layout houses, working places, and services close to each other (i.e., mixed-use development pattern). Accessibility is usually measured as the distance of a location relative to the regional urban center, or the number of jobs available within a given travel distance or time. Accessibility was found to exert a strong influence on per capita VMT [17, 18]. Dispersing employment to suburban locations is associated with increasing per capita vehicle travel [5, 19, 21]. Cervero and Duncan [22] found that the accessibility was negatively associated with the VMT and VHT.

The activity-based travel demand forecasting (TDF) approach views travel demand as a derived demand from the need to pursue activities distributed in space and time [23]. To date, some studies have been conducted to compare the modeling results between the traditional four-step TDF models and activity-based TDF models. Ferdous et al. [24] evaluated the performance of those two models at regional-level and project-level analyses using the data collected in the Columbus metropolitan area, Ohio. The results indicated that activity-based model outperformed overall the four-step model in the region-level analysis. Shan et al.'s study [25] using the data gained in Tampa Bay Region indicated that the activity-based model is more

capable of capturing the non-home based trips than the four-step model.

Emission factors are empirical functional relations between the mass of vehicle emissions and the involved vehicle activities [26–32]. The environmental effect of the traffic management with advanced technologies (e.g., ramp metering, connected vehicle technology) can be depicted by environmental measures (e.g., emission rates and inventories, fuel consumptions). A critical step of estimating values of the measures is to obtain emission factors of the concerned pollutants and apply them to vehicle activities as estimated from traffic simulation. The MOVES model is usually used to provide emission rates in the USA [33].


In light of the above understanding, the paper presents a scenario-based integrated approach to examine interactions between land use development, transportation activities, and mobile emission for sustainability analysis in an integrated simulation platform. Within the platform, categorized models—travel forecasting model, vehicle emission model and microscopic traffic simulation model are integrated heuristically mathematically with data flows via input/output (I/O) interfaces. A case analysis is used to demonstrate the functionality testing of the integrated approach with the data obtained in the Greater Cincinnati area, USA.

The paper is organized as follows: The background and research motivation is followed by the literature review and related work. Then, the research methodology is presented with introduction of major associated mathematical models to be involved in the integrated platform system. The case study demonstrates major analysis functionality of the system with the data obtained from the Greater Cincinnati area. Finally, a summary of the research is presented.

## 2 Research Methodology

### 2.1 Methodological Framework

As shown by Fig. 1, the conceptual hierarchy of the categorized models includes the land use pattern, travel demand forecasting, and carbon emission estimation and they will be interconnected through input and output data flows. In other words, each involved model will be heuristically “assembled” through clarifying their I/O relationships. For example, land use and social economic data are input to travel demand forecasting model to estimate travel trips, including VMT and VHT. The travel forecasting outcomes provide some inputs to the emission model. Some models may be “zoomed in” smaller parts, which cannot be shown by Fig. 1. For example, vehicle specific power (VSP) in KW/ton, the instantaneous tractive

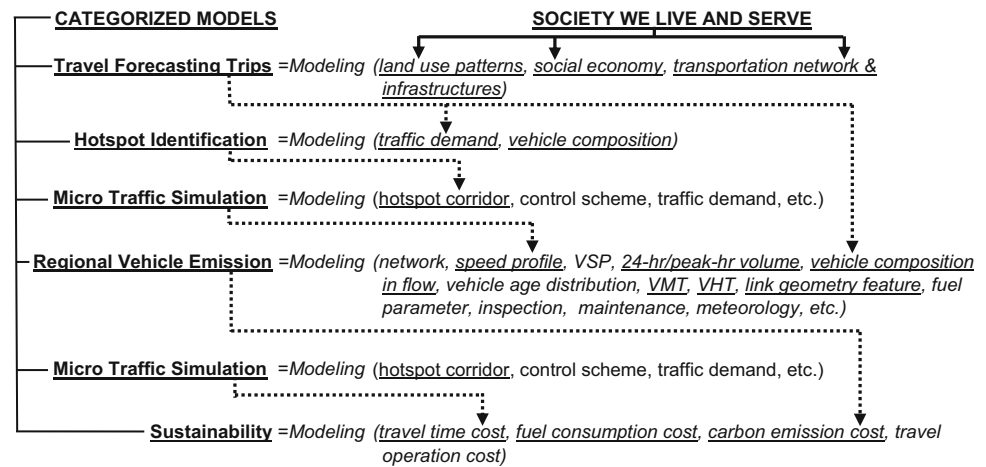**Fig. 1** Conceptual hierarchy of integrated categorized models

power per unit vehicle mass, is a well-acceptable explanation variable in microscopic emission modeling to directly relate it with the emission rate [29, 33–37]. VSP is sensitive to speed and acceleration changes. The acceleration is associated with grades of highways and vehicle masses, and the grades are also associated with topography features [6, 33, 38, 39]. All “Functions” as indicated by Fig. 1 are mathematically developed, and all models are integrated into GIS environment.

## 2.2 Land Use Pattern

The land use pattern is quantitatively depicted by measurements of density, diversity, and accessibility. Density is measured as the gross population rate of residents and employment within designated geographical units over the gross area [40, 41]. Traffic analysis zones (TAZs) is used as the gross area unit in the study. The overall urban density is calculated as the summation of urban population and employment divided by the gross area of the urban area [42], as expressed by Eq. (1).

$$\text{Density} = (\text{Pop} + \text{Emp}) / \text{Area} \quad (1)$$

where Pop is the number of residents in a TAZ, persons; Emp is the number of jobs in a TAZ, jobs; and Area is the TAZ area, mile<sup>2</sup>.

The land use diversity or land use mix is measured by the job-population balance (jobpop) and degree of job mixing (jobmix) to reflect the relative balance between jobs and population and diversity of jobs, respectively [43]. Job-population balance represents the degree of self-sufficiency achieved in a community and is used to measure land use mix in many studies and applications [8, 44, 45]. In a compact land use development policy, it is hoped to make jobs and housing distributions balanced by planning the residential and employment areas within close

communities. Job-population balance at the regional level is defined as the ratio of employment to population, as expressed by Eq. (2) [46].

$$\text{jobpop} = \sum_{i=0}^n (1 - |J_i - \text{JP} \times P_i|) / (J_i + \text{JP} \times P_i) \times ((BJ_i + BP_i) / (TJ + TP)) \quad (2)$$

where  $i$  is the TAZ number;  $n$  is the number of TAZs in the study region;  $J$  is the number of jobs in the TAZ;  $P$  is the number of residents in the TAZ; JP is the average job to population ratio in the study area; TJ is the total jobs in the county; TP is the number of total population in the study area.

The degree of job mixing quantifies homogeneity of employment land use (i.e., retail, service, industry). To measure such mix degree, an entropy formula is applied, and the degree of job mixing is computed as Eq. (3) [46].

$$\text{jobmix} = \sum_{i=0}^n \sum_j (P_j \times \ln(P_j)) / \ln(m) \times ((BJ_i + BP_i) / (TJ + TP)) \quad (3)$$

where  $j$  is the job category number;  $P_j$  is the proportion of  $j$ th job category in a TAZ;  $m$  is the number of job categories.

The degree of job mixing ranges from 0 to 1. A degree of job mixing with a value more approximating to 1 indicates a higher mix.

Accessibility reflects the ability of people to access to different destinations. Many factors affect accessibility, including mobility, quality and affordability of transportation service options, transportation system connectivity, and land use patterns. The accessibility index is constructed from a very popular functional form for the gravity model [18], in which the accessibility is measured as the ratio of jobs to transportation cost to all possible TAZs expressed as Eq. (4).

$$acce = \sum_{s=0}^n J_s / f(t_{rs}) \quad (4)$$

where  $f(t_{rs})$  is the impedance function between two TAZs,  $r$  and  $s$ ;  $J_s$  is the number of jobs in the TAZ  $s$ .


For ease of interpretation, accessibility values are normalized on a scale from 0 to 1 by dividing the computed accessibility index for each TAZ by the highest accessibility value in a region [42].

### 2.3 Regional Travel Demand Estimation Through Activity-Based Modeling

The activity-based model is validated with the Household Travel Survey (HTS) data that was conducted in 2009–2010 Cincinnati GPS-based Household Travel Survey [47]. And the model is embedded into the VISUM simulation environment via its external coding module. The structure of the activity-based travel demand model is illustrated by Fig. 2. Activity patterns can be identified based on travelers' socioeconomic status. Then, the tour destinations and modes are predicted by possibility of choosing each destination and mode, respectively. The probabilities are calculated with nested multinomial logit (NML) model [48]. Next, a trip table containing number of trips between TAZs is generated, and then used as the input to the traffic assignment process. Finally, trips between TAZs are loaded to the roadway network.


In the activity-based travel demand model, a person's daily activities are grouped into a set of tours (or trip

chains). A tour is assumed to have a primary activity and destination that is the major motivation for the journey [49]. Those tours are tied together by an overarching activity pattern while being constrained by the choice of activity pattern. The structure of the activity patterns can be illustrated by Fig. 3. Discrete choice models based on the principle of utility maximization have become the primary method for modeling activity and travel choices [48]. The utility is assumed to consist of a systematic component that can be estimated as a function of explanatory variables [50–52]. The variables include: (1) socioeconomic variables, i.e., household size, income, car ownership, and personal status (employed, students, unemployed), lifecycle, etc.; (2) land use variables, i.e., area type, employment (number of jobs by job type, i.e., industry, service, and retail), and number of households, etc.; and (3) transportation system variables, i.e., travel

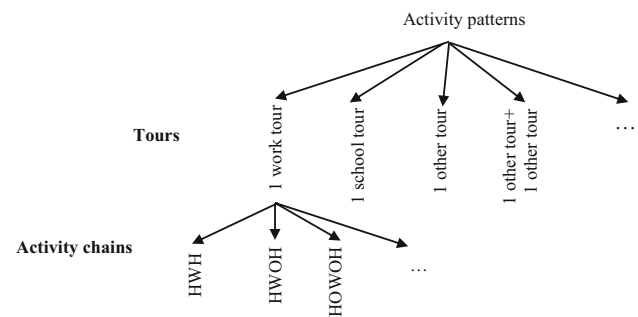

**Fig. 3** Structure of activity patterns

**Fig. 2** Structure of developed activity-based TDF modeling procedure

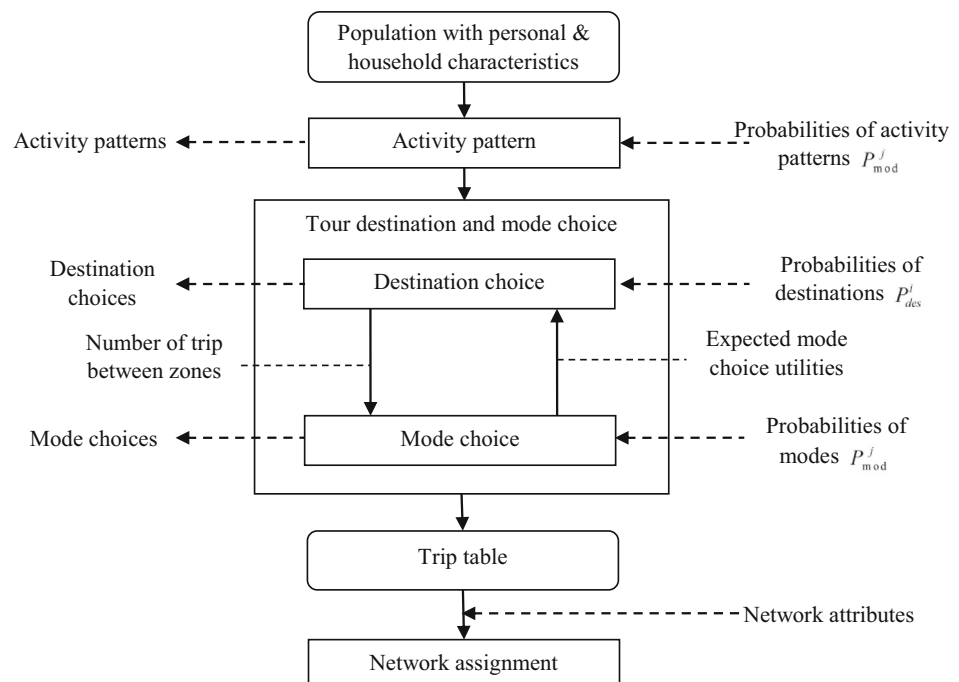

time, and travel cost of a transportation system, etc. With the utility of activity pattern, destination, and transportation mode, the travel choices are often modeled by structured logit models such as multinomial logit (MNL), nested logit (NL) [48].

Activity pattern probabilities ( $P_{actp}^{n|m}$ ) structured as a NL model [48, 49] are calculated by Eqs. (5) through (7).

$$P_{actp}^{n|m} = P_{touc}^m \times P_{actc}^n \quad (5)$$

$$P_{touc}^m = \exp(U_{touc}^m) / \sum_n \exp(U_{touc}^n) \quad (6)$$

$$P_{actc}^n = \exp(U_{actc}^n) / \sum_n \exp(U_{actc}^n) \quad (7)$$

where  $U_{touc}^m$  and  $P_{touc}^m$  are the utility and probability of  $m$ th tour combination, respectively;  $U_{toua}^n$  and  $P_{toua}^n$  are the utility and probability of  $n$ th activity chain combination, respectively;  $P_{actp}^{n|m}$  is the probability to choose  $n$ th activity chain combination under  $m$ th tour combination.

Utilities of the activity chain combinations are defined as a linear function of personal and household attributes and tour activities combination constant; similarly, utilities of tour combinations are defined as a linear function of the natural logarithm sum of utilities of activity chain combinations and tour combination constant [49].

Utilities of tour combinations are defined as a linear function of the natural logarithm sum of utilities of activity chain combinations LOGSUM<sub>*m*</sub> and tour combination constant CONSTANT<sub>*m*</sub>.

$$U_{touc}^m = b_m \times \text{LOGSUM}_m + \text{CONSTANT}_m \quad (8)$$

$$\text{LOGSUM}_m = \ln \sum_{n|m} \exp(U_{actc}^n) \quad (9)$$

$$U_{actc}^n = a1 \times \text{HHSIZE} + a2 \times \text{TOTVEH} + a3 \times \text{INCOME} + \text{CONSTANT}_n \quad (10)$$

where HHSIZE is the number of person in a household; TOTVEH is the number of vehicle owned by a household; INCOME is the household income, 1 = Less than \$25,000, 2 = \$25,000 to \$49,999, 3 = \$50,000 to \$74,999, and 4 = \$75,000 or above; CONSTANT<sub>*n*</sub> is the constant of  $n$ th activity chain combination.

The probability of choosing destination  $i$  ( $P_{des}^i$ ) is calculated with a MNL model [50]:

$$P_{des}^i = \exp(U_{des}^i) / \sum_i \exp(U_{des}^i) \quad (11)$$

$$U_{des}^i = c1 \times \text{HH} + c2 \times \text{INDUSTRY} + c3 \times \text{SERVICE} + c4 \times \text{RETAIL} + c5 \times \text{SCENROLL} + c6 \times \text{AREATYPE} + c7 \times \text{LOGSUM} \quad (12)$$

$$\text{LOGSUM} = \ln \sum_j \exp(U_{mod}^j) \quad (13)$$

where HH is the number of household; INDUSTRY is the number of industry jobs; SERVICE is the number of service jobs; RETAIL is the number of retail jobs; SCENROLL is the school enrollment; AREATYPE is the area type: 1 = CBD&urban, 2 = suburban, 3 = rural; LOGSUM is defined as expected mode choice utilities, as the natural logarithm sum of the mode choice utility.

The mode choice probability of alternative transportation mode  $j$  is calculated with the MNL model [50]:

$$P_{mod}^j = \exp(U_{mod}^j) / \sum_j \exp(U_{mod}^j) \quad (14)$$

$$U_{mod}^j = d1 \times \text{Time} + \text{Constant}_j \quad (15)$$

where  $U_{mod}^j$  is the utility of the mode choice;  $T_j$  is the travel time, min; Constant<sub>*j*</sub> is the constant of transportation mode  $j$ .

The above models are embedded into a travel demand simulation environment. In this study, it is implemented in VISUM by coding the associated algorithm into the computing programs via COM open source function. The simulated network traffic assignment and other derived variable from the simulation will be merged into the performance system.

In addition to the travel trips resulting from running the TDF model, other mobility performance measurements such as average demand/capacity ( $D/C$ ) ratio, total delay, daily VMT, daily VHT will be derived from the TDF outcomes to measure the effectiveness of the traffic operation. The VMT is defined by the US government as a measurement of miles travelled by vehicles in a specified region for a specified time period. VHT is the total vehicle hours expended traveling on the roadway network in a specified area during a specified time period. In general, smaller VMT per capita reflects decreased travel demand. High VHT per capita mean longer travel time to be needed, thus reflects lower mobility efficiency. Therefore, a good planning is supposed to result in both smaller VMT and VHT per capita.

## 2.4 Integrated Evaluation of Environmental Conservation Related Sustainability

Regional-level sustainable analysis involves the estimate of the travel patterns and equivalent vehicle carbon dioxide (CO<sub>2</sub>) emission in the context of changes in land use, population, employment, and school enrollment distributions under a given scenario. With the base sociodemographics, the target land uses are derived from the sociodemographic projection under a certain land use



development alternative. The target land use and associated sociodemographics, together with geographical TAZ information and transportation infrastructure, are used as inputs to the TDF model. The TDF process estimates travel behaviors, and roadway traffic information. Then, the calculated roadway traffic data are used as input of transportation activities for the emission estimation model (i.e., MOVES in the study) to simulate regional CO<sub>2</sub> emission.

Environmental conservation is one of the important goals in building sustainable transportation systems. It is referred to the natural resources saved or expended. The transportation sector has been reported to contribute more than 25% of GHGs emissions in the United States, which is a looming threat of climate change [53]. It is necessary to target the reduction of vehicle related CO<sub>2</sub> emission and decreasing the use of fossil fuels through reducing travel demand as objectives of the environment conservation. Besides the environmental objectives, social equity and economic development are two another goals need to be considered in transportation planning. The social equity goal aims to improve the mobility and accessibility to allow travelers to save money. The total travel time is an aggregate measurement of mobility and accessibility, which are concerned in the social equity. Economic development reflects direct economic impacts of transportation systems in operation, or management, and relevant environmental impact. Therefore, associated costs of CO<sub>2</sub> equivalent, fuel consumption, and total travel time are adopted as the measurements to evaluate the transportation sustainability. Calculations of these costs are represented through Eqs. (16)–(19). Based on these measurements, a link-based traffic operation cost (Travel operation cost, \$) is developed to synthesize the monetary value derived from travel time, fuel consumption, and carbon cost, as shown by Eq. (20).

$$\text{Travel time cost}_i = \text{VOT} \times \text{VO} \times \text{Volume}_i \times \text{Time}_i \quad (16)$$

$$\text{Fuel consumption cost}_i = \text{Volume}_i \times L_i \times \text{FE}_i \times \text{Price}_{\text{Gas}} \quad (17)$$

$$\text{FE}_i = -0.0066 \times \text{Speed}_i^2 + 0.823 \times \text{Speed}_i + 6.01577 \quad (18)$$

$$\text{Carbon cost}_i = \text{CO}_2 \text{ equivalent}_i \times c \quad (19)$$

$$\begin{aligned} \text{Travel operation cost} = \sum_i & (\text{Travel time cost}_i \\ & + \text{Fuel consumption}_i \\ & + \text{Carbon cost}_i) \end{aligned} \quad (20)$$

where  $i$  is the number of a roadway link; Travel time cost <sub>$i$</sub>  is the cost associated with total travel time of all travelers traversing on link  $i$ , \$; VO is the vehicle occupancy; Volume <sub>$i$</sub>  is the number of vehicle on  $i$ th link, pcu; VOT is the average value of time, \$; Time <sub>$i$</sub>  is the average vehicle

travel time on  $i$ th link,  $h$ ; Fuel consumption cost <sub>$i$</sub>  is the cost associated with the total fuel consumption of all vehicles traversing on link  $i$ , \$;  $L_i$  is the length of link  $i$ , mile; FE <sub>$i$</sub>  is the average fuel economy calculation, mpg, which is used to estimate the difference in fuel consumption of the vehicles and is calculated by the regression equation from the fuel efficiency data provided from the MOVES model [6]; Speed <sub>$i$</sub>  is the average vehicle speed on  $i$ th link, mph; Price<sub>Gas</sub> is the gas price, \$/gallon; Carbon cost <sub>$i$</sub>  is the cost associated with the CO<sub>2</sub> equivalent emitted by all vehicles traversing on link  $i$ , \$; CO<sub>2</sub> equivalent <sub>$i$</sub>  is the total amount of vehicle CO<sub>2</sub> equivalent on link  $i$ , US ton, which is calculated by MOVES using link-based traffic volume, speed, and geometry, etc., as inputs;  $c$  is the unit cost of CO<sub>2</sub> equivalent, US\$/US ton.


### 3 Case Study

#### 3.1 Regional-Level Scenarios of Land Use Development Given Increased Population and Employment

The Great Cincinnati area is a metropolitan area with a total of almost 2 million population geographically residing in eight counties in state of Ohio, Kentucky and Indiana, respectively. The Great Cincinnati area is chosen as the case study area. Year 2010 is used as the baseline year. Scenarios are developed by introducing projected changes in population and employment of the study area compared with the baseline year. To investigate the travel demand impact of land use due to such socioeconomic changes, we use density, land use mix, one-center and multi-center urban structure to depict land use pattern. The land use pattern, sociodemographics, and transportation infrastructures for year 2010 are used as the baseline datasets. Based on consulted information from the local metropolitan planning organization, it is implicated that 15% increase in population, employment, and school enrollment by year 2030 is a reasonable assumption for the scenario-based analysis. Based on this assumption, three scenarios are devised, as shown in Fig. 6:

- Planning for single employment-oriented-center development (S1),
- Planning for single mixed-center-oriented development (S2), and
- Two-mixed-center-oriented development (S3).

In S1, only single center is developed, and the majority of the increase employment is allocated to the center while increased population is dwelled beyond the center area. In S2, compared with S1, both increased employment and population and school enrollment as well are assumed to

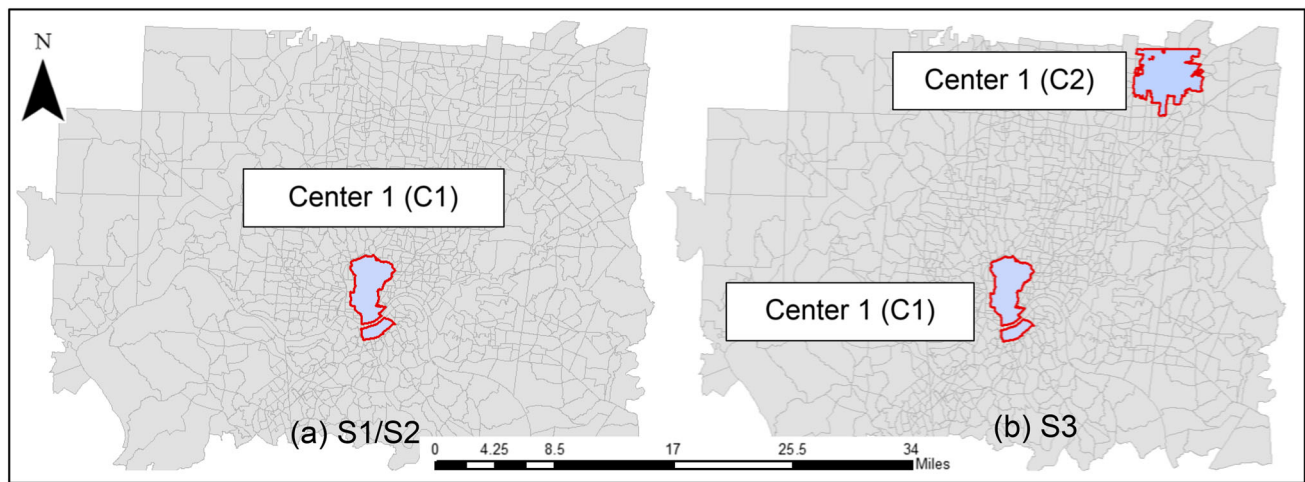

**Fig. 4** Incentive boundary of each assumed scenario in the case study

locate within the center area. Similar to S2, the mixed-use center schema is adopted in S3, but two different centers are planned.

The following steps are involved in developing a regional-level scenario. First, the incentive boundaries need to be determined to define the boundaries of the future centers in the study area. In S1 and S2, a single center—Center 1 (C1) is developed in the traditional downtown area. In S3, two centers are developed—C1 and Center 2 (C2) which is located in Mason and West Chester areas. Figure 4 illustrates the locations of C1 and C2. Table 1 enlists assumed changes of the population, employment, and school enrollment in the incentive area and non-incentive area. The incentive area is the area where the future development is planned to satisfy the addressed demand. The non-incentive area refers to the areas outside the defined incentive boundaries.


Figures 5 and 6 present projected population and employment changes in each scenario compared with the background data. The population and employment growth rates in the affected TAZs are assumed to remain static. Population/employment growth rate is calculated as the ratio of the total number of increased population/employment to the total number of population/employment of the baseline. In S1, the increased population is widely distributed in the study area, and majority of increased employment are located in the defined center C1. S2 adopts

the same employment project schema as S1, but S2 develops a mixed-use center and allocates most of the increased population in the C1 area. S3 develops two centers C1 and C2 with the mixed-use development strategy.


With the projected land use under the given changes in population and employment, some statistics of land use characteristics in terms of land use density, diversity, and design are calculated for S1, S2, and S3 (listed in Table 2). Results indicate that S1 and S2 have the same high employment density in C1. The major difference between S1 and S2 is that S2 has a much higher population density in the C1. Compared with S2, S3 has two centers developed. Unlike S1 and S2, in S3 the majority of the increased population and employment are allocated into two centers, i.e., C1 and C2, rather than one center only. In S1, C1 has a high job/population ratio of 1.563. That is much higher than the average ratio 0.502 of the entire study area and could result in longer commuting distances. In S2 and S3, the job-population ratio is 0.636 and 0.726, respectively. The job-population ratio of C2 is 0.262 in S2 and 0.427 in S3. With respect to the job mix, in S3, the C2 has a higher degree of mix of jobs, which obtains a value of 0.482 and is increased by 0.171 compared to that in S1 and S2. For the accessibility, it can be concluded that the high-density, and well-mixed land use pattern provides an improved accessibility for travelers to destinations, such as C1 in S2 (with

**Table 1** Assumed changes in land use for each scenario

Scenarios	Growth within the center(s)			Growth outside the center(s)		
	POP (%)	EMP (%)	SCENROLL (%)	POP (%)	EMP (%)	SCENROLL (%)
S1	2	13	2	13	2	13
S2	13	13	13	2	2	2
S3	13	13	13	2	2	2

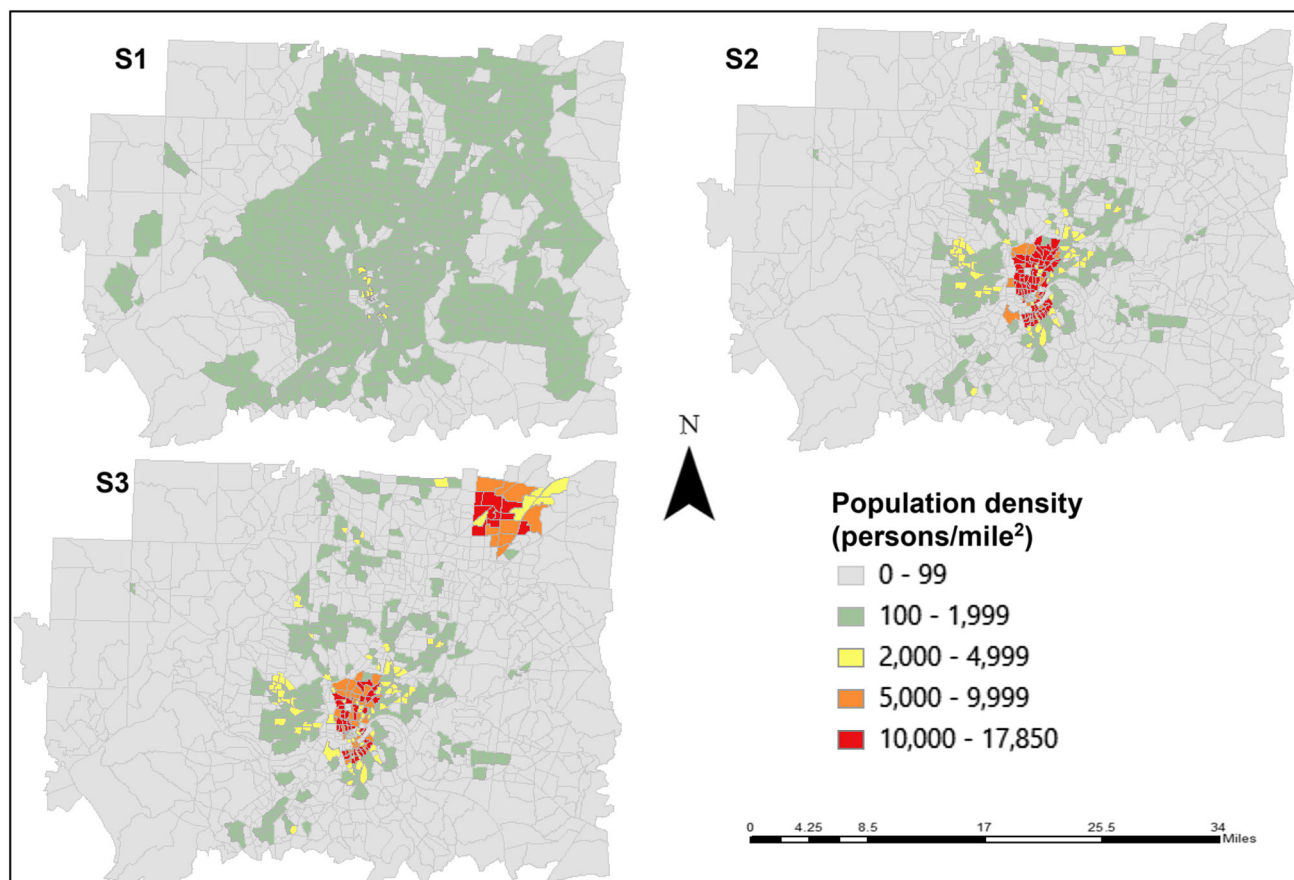

**Fig. 5** Projected changes in population density compared with baseline data

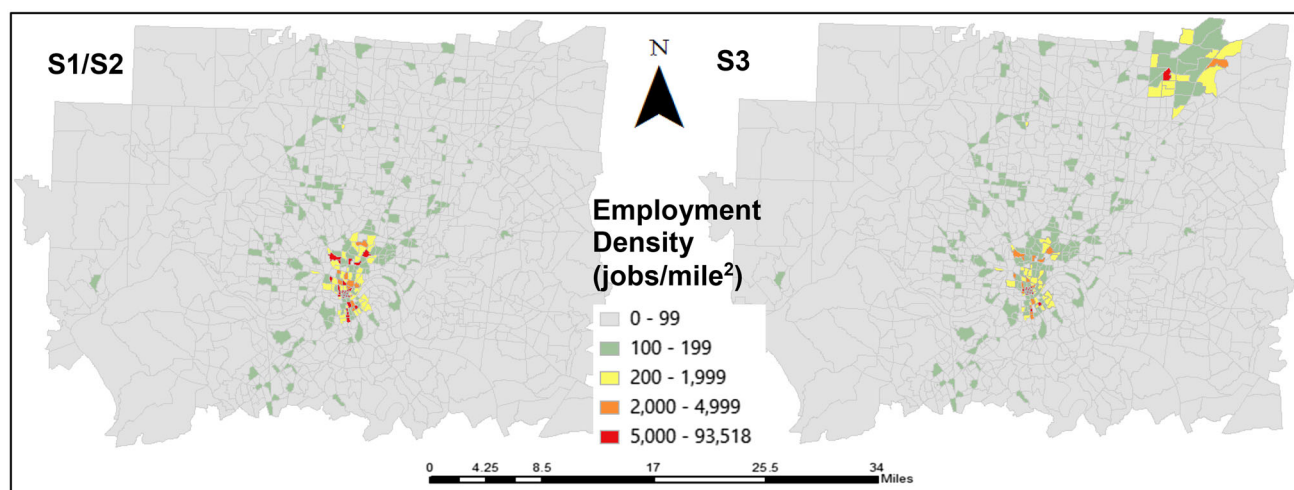

**Fig. 6** Projected changes in employment density compare with baseline data

a value of 0.825), and C2 in S3 (with a value of 0.671). According to the discussion in the previous section, the high-density, mixed-use, and easier-accessible land use development tends to reduce travel distance, thus reduces total vehicle miles travelled, and consequential vehicle CO<sub>2</sub> emission and fuel consumption.

### 3.2 Result Analysis of Running Activity-Based TDF Modeling with Local Data

The activity-based TDF model is developed following the structures as discussed in methodology section and calibrated using the 2009–2010 household travel survey data



**Table 2** Statistics of land use patterns for each scenario

Land use variables	Subareas by scenario								
	S1			S2			S3		
	C1	C2	Other	C1	C2	Other	C1	C2	Other
Density <sup>a</sup>	16,026	2747	1902	25,139	2495	1751	17,263	10,119	1751
Job-population	1.563	0.262	0.426	0.636	0.262	0.480	0.726	0.427	0.480
Job mix	0.672	0.311	0.411	0.672	0.311	0.411	0.563	0.482	0.411
Accessibility	0.791	0.317	0.524	0.852	0.317	0.524	0.821	0.671	0.524

<sup>a</sup> The unit of the density is (persons + jobs)/mile<sup>2</sup>

**Table 3** Number of trips, average trip length, and percentage of intra-center trips

Scenarios	Trips	Average trip length (mile)	Percentage of intra-center trip (%)	
			C1	C2
S1	$5.9023 \times 10^6$	5.56	7.91	0.87
S2	$5.9065 \times 10^6$	5.14	12.19	0.78
S3	$5.9067 \times 10^6$	5.13	7.66	4.78


**Table 4** Comparison of scenario costs

Scenario	Travel time cost ( $10^3$ \$)	Fuel consumption cost ( $10^3$ \$)	Carbon cost ( $10^3$ \$)	Travel operation cost ( $10^3$ \$)
S1	17,832	3988	702	22,522
S2	14,498	3691	660	18,849
S3	13,446	3683	637	17,766

[47] and traffic data at typical permanent traffic monitoring stations at major highways in the Cincinnati area. Since that activity pattern choice behaviors are different among workers, students, and others, the activity pattern utility function is then calibrated separately for these three categorized users. Tables 3 and 4 show the calibrated models for activity pattern utility, destination choice, and mode choice for categorized users and modes with difference trip purposes. As a result of running the TDF model, the total number of trips, percentage of intra-center trip, and average trip length of each scenario are summarized in Table 3. A intra-center trip is referred to a trip with both origin and destination located within the same center. S1 is developed

with one single-use center, while S2 and S3 are developed with denser and mixed-use center(s). With the mixed and multi-center development, the number of trips increases slightly. Since the mixed-use, compact development can bring closer origins and destinations, the average travel distances are shorter in S2 and S3 than that in S1. The multi-center development strategy in S3 produces shortest average trip length. In the wake of the increasing of land use intensity and diversity, more intra-center trips are generated in each center of S3.

Figure 7a visualizes VMT and VHT by scenario. Compared with S1, there are 7.39 and 18.74% decrease in VMT and VHT, respectively, in S2, and 7.58 and 24.68%

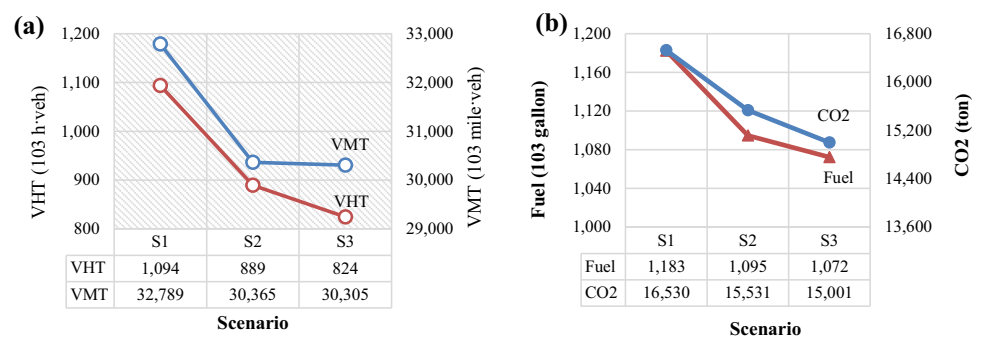**Fig. 7** **a** VMT and VHT by scenario; **b** fuel consumption and CO<sub>2</sub> emission by scenario

decrease in VMT and VHT, respectively, in S3. While the number of trips increases slightly in S2 and S3, the overall trip length is reduced as a result of the compact land use development. In other words, the increasing of the trip number is not big enough to offset the reduction of VMT and VHT as a result of the reduced trip distances.

Figure 7b visualizes the values of CO<sub>2</sub> emission and fuel consumption of each scenario. Compared with S1, there is a reduction of 7.44 and 9.33% in CO<sub>2</sub> in S2 and S3 accordingly. The shorter travel distance in S2 compared with S1 results in a salient fuel consumption reduction. There is a 6.04 and 9.25% of fuel consumption reduction in S2 and S3, respectively, compared with S1.

Table 4 demonstrates the cost-related estimation results for scenarios S1, S2, and S3 with the list of travel time cost, fuel consumption cost, carbon cost, and total travel operation cost. Compared with S1, S2, and S3 achieve a 16.31 and 21.11% reduction in the travel operation cost, respectively. The results show that mixed-use, compact development patterns produce less cost than the single-used, sprawl development pattern. Furthermore, the multi-center development strategy can help to reduce the travel operation cost compared with the single-center scenario.

## 4 Summary and Conclusion

The methodology involved in the development of the integrated system is reflective of a scientific approach and synthetic analysis system to facilitate the exploration and disclosure of the cause-and-effect mechanism between the land use or relevant planning with projected socioeconomic changes, and their impact on transportation operation and carbon emission. The activity-based model has been adapted into the regional-level transportation emission analysis. The scenario development function in the system is designed to provide the functionality for addressing “what-if” transportation emission impacts pertinent to traffic situations that are forecasted from affected future land use changes. This method has been viewed by far as the best way to deal with uncertainty related to decision-making factors for future forecasts that cannot be predicted from modeling. A case study is conducted to demonstrate the functionality and application of the integrated system in the Great Cincinnati area. In the case study, the impact of land use pattern on travel demand and vehicle emissions is examined. Compared with single-use development, the mixed land use pattern is capable of reducing the total vehicle travel, CO<sub>2</sub> emissions, and fuel consumption. Meanwhile, the multi-center based compact development can bring closer origins and destinations. As the consequence, less VMT and VHT, vehicle CO<sub>2</sub> emissions and fuel consumption could be resulted. The case study results

indicate that such an integration approach can facilitate the process of assessing land use planning alternatives with respect to not only travel demand impact, but also traffic-source emission based sustainability.

This synthetic computing platform will be ultimately developed to facilitate the scenario-based quantitative analysis of cause-and-effect mechanisms between land use changes and/or traffic management and control strategies, their impacts on traffic mobility and the environment. For example, with the integrated system, a set of “what-if” analyses can be performed to evaluate transportation system performances with the promotion of transit system, increased investment in bicycle facilities, and improvement of community walkability. The measured performances can help planners and policy-makers to assess strategies and/or policies for improved transportation mobility and sustainability. The application of this functionality will be presented in other publications in the future.

**Acknowledgements** The authors appreciate the support of the U.S. Environmental Protection Agency via funded research through its Office of Research and Development. It has been subjected to the Agency’s administrative review and has been approved for external publication. Any opinions expressed in this paper are those of the authors and do not necessarily reflect the views of the Agency; therefore, no official endorsement should be inferred. Any mention of trade names or commercial products does not constitute endorsement or recommendation for use.

**Open Access** This article is distributed under the terms of the Creative Commons Attribution 4.0 International License (<http://creativecommons.org/licenses/by/4.0/>), which permits unrestricted use, distribution, and reproduction in any medium, provided you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons license, and indicate if changes were made.

## References

1. Arts J, Hanekamp T, Dijkstra A (2014) Integrating land-use and transport infrastructure planning: towards adaptive and sustainable transport infrastructure. In: Transport research arena 2014, Paris
2. Heeres N, Tillema T, Arts J (2012) Duurzame Planning Van Weginfrastructuur: Een International Perspectief (Sustainable Planning of Road Infrastructure an International Perspective). Research report Faculty of Spatial Sciences, University of Groningen, Groningen
3. Wei H, Liu H, Lu M, Coifman B (2014) Traffic data and integrated project-level PM<sub>2.5</sub> conformity analysis. Research report no.: FHWA/OH-2014/9
4. Wei H, Yang YJ, Wang X, Yao Z, Liu H, Liang S (2012) Framework for integrating traffic-source emission estimates into sustainability analysis. In: ASCE proceedings of 12th COTA international conference of transportation professionals (CICTP 2012), Beijing, China, August 3–6, 2012
5. Handy S, Tal G, Boarnet MG (2013) Policy brief on the impacts of regional accessibility based on a review of the empirical literature. California Air Resources Board, California. <https://arb.ca.gov/>

- [ca.gov/cc/sb375/policies/regaccess/regional\\_accessibility\\_brief120313.pdf](http://ca.gov/cc/sb375/policies/regaccess/regional_accessibility_brief120313.pdf). Accessed July 2016
6. U.S. Environmental Protection Agency (U.S. EPA) (2015) Social Cost of Carbon. <https://www.epa.gov/climatechange/social-cost-carbon>. Accessed July 2016
  7. Dasigi S (2015) An integrated approach linking land use and socioeconomic characteristics for improving travel demand forecasting. Master of Science Thesis (Advisor: Heng Wei). University of Cincinnati
  8. Zuo T, Wei H, Liu H (2016) Impacts of compact development density on travel demand: a scenario-based analysis in Hamilton County, Ohio, U.S. (Paper No.: 16-4135). In: Compendium of papers for 95th transportation research board annual meeting, Washington, DC, January 10–14, 2016
  9. Wu P (2007) Modeling transportation-related emissions using GIS. In: 86th annual meeting of the transportation research board, Washington, DC
  10. Yao Z, Wei H, Rohne A, Corey J, Perugu H (2015) Connecting household socioeconomics and travel carbon footprint: empirical results from high-resolution GPS household travel survey (Paper No.: 15-5897). In: Compendium of papers for 94th transportation research board annual meeting, Washington, DC, January 11–15, 2015
  11. Boarnet M, Crane R (2001) The influence of land use on travel behavior: specification and estimation strategies. *Transp Res A Policy Pract* 35(9):823–845
  12. Halat H, Saberi M, Mahmassani HS (2015) Land use and travel behavior: empirical evidence of the effects of mixed-use development on travel mode choice in Chicago. In: Transportation research board 94th annual meeting (No. 15-3950)
  13. Litman T (2015) Land use impacts on transport how land use factors affect travel behavior. Victoria Transport Policy Institute, Victoria
  14. Maat K, Harts JJ (2001) Implications of urban development for travel demand in the Netherlands. *Transp Res Rec J Trans Res Board* 1780:9–16
  15. Miller SJ (2010) Feasibility of using jobs/housing balance in Virginia statewide planning (No. FHWA/VTRC 11-R1). Virginia Transportation Research Council
  16. Transportation Research Board (TRB) (2009). Driving and the built environment, the effects of compact development on motorized travel, energy use, and CO<sub>2</sub> emissions. Special Report 298. Washington, DC
  17. Ewing R, Cervero R (2010) Travel and the built environment: a meta-analysis. *J Am Plan Assoc* 76(3):265–294
  18. Kockelman MK (1997) Travel behavior as function of accessibility, land use mixing, and land use balance, evidence from San Francisco Bay Area. *Transp Res Rec J Transp Res Board* 1607:116–125
  19. Boarnet MG, Hsu H-P, Handy S (2011) Draft policy brief on the impacts of jobs-housing balance based on a review of the empirical literature. University of California, Irvine
  20. Crane R, Chatman DG (2003) Traffic and sprawl: evidence from U.S. commuting, 1985 to 1997. *Plan Mark* 6(1):14–22
  21. Zhang L, Hong J, Nasri A, Shen Q (2012) How built environment affects travel behavior: a comparative analysis of the connections between land use and vehicle miles traveled in UC cites. *J Transp Land Use* 5(3):40–52
  22. Cervero R, Duncan M (2006) Which reduces vehicle travel more: jobs-housing balance or retail-housing mixing? *J Am Plan Assoc* 72(4):475–490
  23. Jones PM, Koppelman FS, Orfeuil JP (1990) Activity analysis: state-of-the-art and future directions. In: Jones PM (ed) Developments in dynamic and activity-based approaches to travel analysis, Gower, Aldershot, pp 34–55
  24. Ferdous N, Bhat C, Vana L, Schmitt D, Bowman JL, Bradley M, Pendyala R (2011) Comparison of four-step versus tour-based models in predicting travel behavior before and after transportation system changes: results interpretation and recommendations. Report FHWA/OH-2011/2014. Office of Research and Development, Ohio Department of Transportation, Columbus
  25. Shan R, Zhong M, Lu C (2013) Comparison between traditional four-step and activity-based travel demand modeling—a case study of Tampa, Florida. In: Proceedings of the second international conference on transportation information and safety ICTIS (2013), held in Wuhan, China, June 29–July 2. pp 627–633
  26. Franco V, Kousoulidou M, Muntean M, Ntziachristos L, Hausberger S, Dilara P (2013) Road vehicle emission factors development: a review. *Atmos Environ* 70:84–97
  27. Liu H, Wei H, Yao Z (2012) Modeling ITS data sources for generating realistic traffic operating parameters for project-level conformity analysis (Paper No. 0401). In: Proceedings for 15th IEEE conference on intelligent transportation systems, Anchorage, Alaska, USA, Sept. 16–19, 2012. ISSN: 2153-0009. pp 1912–1917
  28. Liu H, Wei H, Yao Z (2014a). Validating MOVES PM2.5 emission factor empirically by considering accumulative emission effect. In: ASCE sponsored proceedings for the 14th COTA international conference of transportation professionals (CICTP 2014), Changsha, China, July 4–7, 2014
  29. Liu H, Wei H, Yao Z, Ren H, Ai Q (2014b) Modeling and evaluating short-term on-road PM2.5 emission factor using different traffic data sources (Paper No. 14-3253). In: Compendium of papers CD-ROM for 93rd transportation research board annual meeting, Washington, DC, January 12–16, 2014
  30. Perugu H, Wei H, Yao Z (2016) Estimating the contribution of heavy-duty trucks to the Urban PM2.5 Pollution (Paper No.: 16-1406). In: Compendium of papers for 95th transportation research board annual meeting, Washington, DC, January 10–14, 2016
  31. Perugu H, Wei H, Yao Z (2014) Modeling truck activity using short-term traffic counts for reliable estimation of heavy-duty truck emissions in Urban areas (Paper No. 14-4350). In: Compendium of papers CD-ROM for 93rd transportation research board annual meeting, Washington, DC, January 12–16, 2014
  32. Yao Z, Wei H, Ma T, Yang J, Ai Q, Liu H (2013) Developing operating mode distribution inputs for MOVES using computer vision-based vehicle data collector. *Transp Res Rec J Transp Res Board* (2340):49–58
  33. U.S. Environmental Protection Agency (U.S. EPA) (2014) User guide for MOVES2014. U.S. EPA, office of transportation and air quality (OTAQ). Report No.: EPA-420-B-14-055
  34. Coelho MC, Farias T, Roupail NM (2005) Impact of speed control traffic signals on pollutant emissions. *Transp Res D Transp Environ* 10(4):323–340
  35. Qu Y, Holmén B, Ravishanker N (2007) Predicting light duty gasoline vehicle on road particle number concentrations from gas concentration using time series cross section regression. Department of Statistics, University of Connecticut, Storrs
  36. Yao Z, Wei H, Wang XH, Liu H, Yang YJ (2014) Scenario-based carbon footprint inventory tool for urban sustainable development decision support: the Cincinnati case study (Paper No. 14-3242). In: Compendium of papers CD-ROM for 93rd transportation research board annual meeting, Washington, DC, January 12–16, 2014
  37. Yao Z, Wei H, Perugu H, Liu H, Li Z (2014) Sensitivity analysis of project level MOVES running emission rates for light and heavy duty vehicles. *J Traffic Transp Eng* 1(2):81–96
  38. Kim BY, Waysonb RL, Fleming GG (2002) Development of the traffic air quality simulation model (TRAQSIM). <http://cat.inist.fr/?aModele=afficheN&cpsidt=18600460>

39. Park S, Rakha H, Farzaneh M, Zietsman J, Lee DW (2010) Development of fuel and emission models for high speed heavy duty trucks, light duty trucks, and light duty vehicles. In: IEEE conference on intelligent transportation systems (ITSC), 2010 13th international IEEE, pp 25–32
40. Cervero R, Kockelman K (1997) Travel demand and the 3Ds: density, diversity, and design. *Transp Res D* 2(3):199–219
41. Gomez-Ibanez JD et al (2009) Driving and the built environment, the effects of compact development on motorized travel, energy use, and CO<sub>2</sub> emissions. *Transp Res Board*, Washington
42. Ewing R, Dumbaugh E, Brown M (2001) Internalizing travel by mixing land uses study of master-planned communities in south Florida. *Transp Res Rec J Transp Res Board* 1780:115–120
43. Bordoloi R, Mote A, Sarkar PP, Mallikarjuna C (2013) Quantification of land use diversity in the context of mixed land use. *Soc Behav Sci* 104:563–572
44. Bento AM, Cropper ML, Mobarak AM, Vinha K (2005) The effects of urban spatial structure on travel demand in the United States. *Rev Econ Stat* 87(3):466–478
45. Zhou J, Wang Y, Schweitzer L (2012) Jobs/housing balance and employer-based travel demand management program returns to scale: evidence from Los Angeles. *Transp Policy* 20:22–25
46. Hamidi S, Ewing R (2014) A longitudinal study of changes in urban sprawl between 2000 and 2010 in the United States. *Landsc Urban Plan* 128:72–82
47. Wargelin L, Stopher P, Minser J, Tierney K, Rhindress M (2012) GPS-based household interview survey for the Cincinnati, Ohio region. Report No.: FHWA/OH-2012/1
48. Castiglione J, Bradley M, Gliebe J (2015) Activity-based travel demand models: a primer (No. SHRP 2 Report S2-C46-RR-1)
49. Bowman JL, Ben-Akiva ME (2001) Activity-based disaggregate travel demand model system with activity schedules. *Transp Res A Policy Pract* 35:1–28
50. McNally MG (2000) Activity-based models. University of California, Irvine
51. Newbold KB, Scott DM, Spinney SEL, Kanaroglou P, Paez A (2005) Travel behavior within Canada's older population: a cohort analysis. *J Transp Geogr* 13:340–351
52. Vovsha P, Petersen E, Donnelly R (2004) Impact of intra-household interactions on individual daily activity-travel patterns. *Transp Res Rec J Transp Res Board* 1898:87–97
53. U.S. Environmental Protection Agency (U.S. EPA) (2011) Guide to sustainable transportation performance measures